


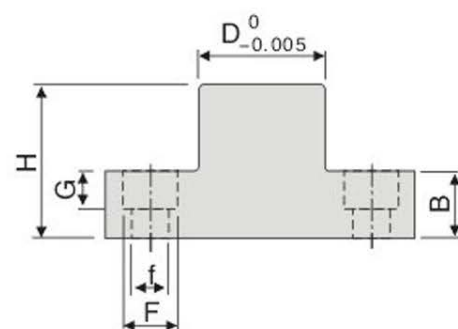
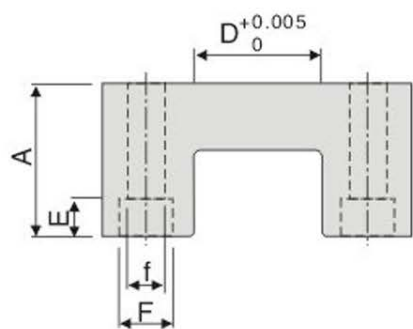
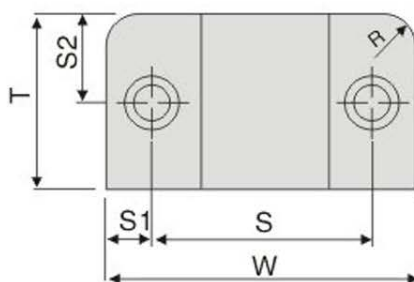


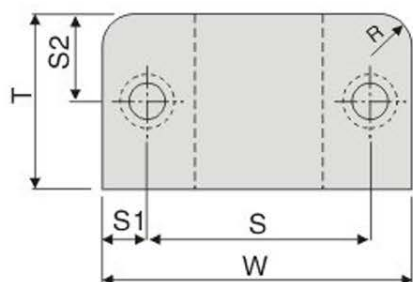

使用例  
Example



M材質	Hardness	Heat Treatment
Material	硬度	熱處理
SKS30	HRC53°~56°	真空處理
SKD11	HRC58°~62°	Vacuumed

Type	W 0 -0.01	T±0.25	A ±0.05	B±0.05	C	D	E	組立螺絲 screw
JH048-15	38.1	25.4	22.17	9.47	13.13	12.7	7	M5
JH 048-25	63.5	38.1	34.87	15.82	19.48	25.4	8	M6
JH048-35	88.9	50.8	44.4	19	25.7	36.58	11	M8

F	f	G	H±0.25	R±0.25	S±0.25	S1±0.25	S2±0.25
10.5	6	7	22.1	7	25.4	6.35	12.7
12.0	7.2	8	34.8	8.5	44.45	9.53	19.05
15.5	10.5	11	44.2	9.5	63.5	12.7	25.4

● Order: Type

備注：圓面以外特殊規格可定制

2D下載

3D下載

返回索引