




2 FLUTE LONG NECK CONICAL DEEP GEOOVE BALL NOSE

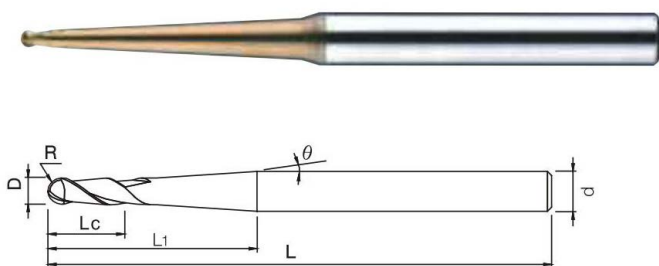

淬硬鋼 HarednedSteel HRC55-58	淬硬鋼 HarednedSteel HRC>65	沉澱硬化不銹鋼 Precipitation hardeningStainless Steel	普通鋼 Commom Steel HRC<25
●	△	●	●
合金鋼 alloy Steel HRC<45	灰鑄鐵 Grey Cast Iron	銅合金 CopperAlloy	不銹鋼 Stainless steel
△	△	△	△
鈦合金 Titanium Alloy	鋁合金 Aluminum si<9%	鎳基高溫合金 Nicle Based Alloy	複合材料 Composite Material
△	△	△	△

備注：● 非常適合 ○ 比較適合 △ 不適合



R≤6	R<8		
±0.01	±0.02		
D≤12	D>12		
0 -0.020	0 -0.030		
4≤d≤6	8≤d≤10	12≤d≤16	16≤d≤25
0 -0.006	0 -0.009	0 -0.011	0 -0.013

商品编号 Product number	半徑(R) Radius of R	刃徑(D) Blade diameter	刃長(Lc) Blade length	柄徑(d) Shank diameter	全長(L) Overall length	有效長(L1) Effective long	刃數 Flute
MH5802BLTR0154501	0.15	0.3	0.30	4	50	1	2
MH5802BLTR0154502	0.15	0.3	0.30	4	50	2	2
MH5802BLTR0154503	0.15	0.3	0.30	4	50	3	2
MH5802BLTR0204502	0.20	0.4	0.40	4	50	2	2
MH5802BLTR0204504	0.20	0.4	0.40	4	50	4	2
MH58028LTR0204506	0.20	0.4	0.40	4	50	6	2
MH5802BLTR02504502	0.25	0.5	0.50	4	50	2	2
MH5802BLTR02504503	0.25	0.5	0.50	4	50	3	2
MH5802BLTR02504504	0.25	0.5	0.50	4	50	4	2
MH5802BLTR02504506	0.25	0.5	0.50	4	50	6	2
MH5802BLTR0304502	0.30	0.6	0.60	4	50	2	2
MH5802BLTR0304503	0.30	0.6	0.60	4	50	3	2
MH5802BLTR0304504	0.30	0.6	0.60	4	50	4	2
MH5802BLTR0304506	0.30	0.6	0.60	4	50	6	2
MH5802BLTR0404502	0.40	0.8	0.80	4	50	2	2
MH5802BLTR0404503	0.40	0.8	0.80	4	50	3	2
MH5802BLTR0404504	0.40	0.8	0.80	4	50	4	2
MH58028LTR0404505	0.40	0.8	0.80	4	50	6	2
MH5802BLTR0404508	0.40	0.8	0.80	4	50	8	2
MH5802BLTR04045010	0.40	0.8	0.80	4	50	10	2
MH5802BLTR0504505	0.50	1.0	1.00	4	50	5	2
MH5802BLTR0504506	0.50	1.0	1.00	4	50	6	2
MH5802BLTR0504508	0.50	1.0	1.00	4	50	8	2
MH5802BLTR05045010	0.50	1.0	1.00	4	50	10	2
MH58028LTR05045012	0.50	1.0	1.00	4	50	12	2
MH5802BLTR05045016	0.50	1.0	1.00	4	50	16	2
MH5802BLTR07504508	0.75	1.5	1.50	4	50	8	2
MH5802BLTR075045010	0.75	1.5	1.50	4	50	10	2